


SELECT YOUR GUN

4 versions to meet all your needs:



Nanogun Airmix® Electrostatic Spraygun

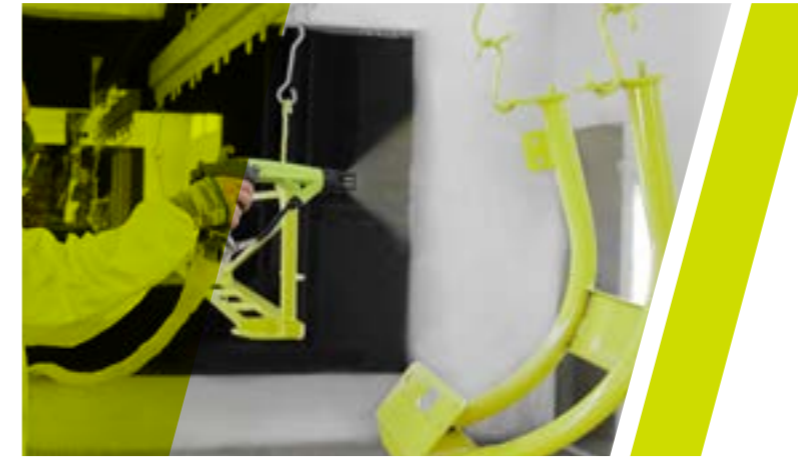

GUN VERSION:	Compatible with solvent based paint		Working with paint resistivity (MΩ.cm)	Recommended working pressure (bar)
	HR	LR		
MX 120	✓	✓	10 to 500 0.5 to 200	60 - 120
MX 200	✓	✓	10 to 500 0.5 to 200	90 - 200

HR: High Resistivity (paint) with Quick Disconnect

LR: Low Resistivity (paint)


Mark	Nanogun Airmix® (Handgun + hoses + Control module + tools + 09-091 Tip)	
	MX 120 with 09-091 Tip	MX 200 with 09-091 Tip

1 HR VERSION	EU US	EU US
Paint hose = 7.5 m	910021113-07 910021113-072	910021115-07 910021115-072
Paint hose = 15 m	910021113-15 910021113-152	910021115-15 910021115-152
Paint hose = 30 m	910021113-30 910021113-302	910021115-30 910021115-302

2 LR VERSION	EU US	EU US
Paint hose = 7.5 m	910021114-07 910021114-072	910021116-07 910021116-072
Paint hose = 15 m	910021114-15 910021114-152	910021116-15 910021116-152
Paint hose = 30 m	910021114-30 910021114-302	910021116-30 910021116-302

Tips	Water flow rate (cc/min) at 120 bar	Water flow rate (cc/min) at 200 bar	Fan width (cm) at dist. = 25 cm	Reference
04.11	290	380	25	130001414
06.15	430	570	33	130001419
09.091	590	770	21	130001420
12.11	790	1030	25	130001425
14.13	940	1230	29	130001430

More tips available, contact us

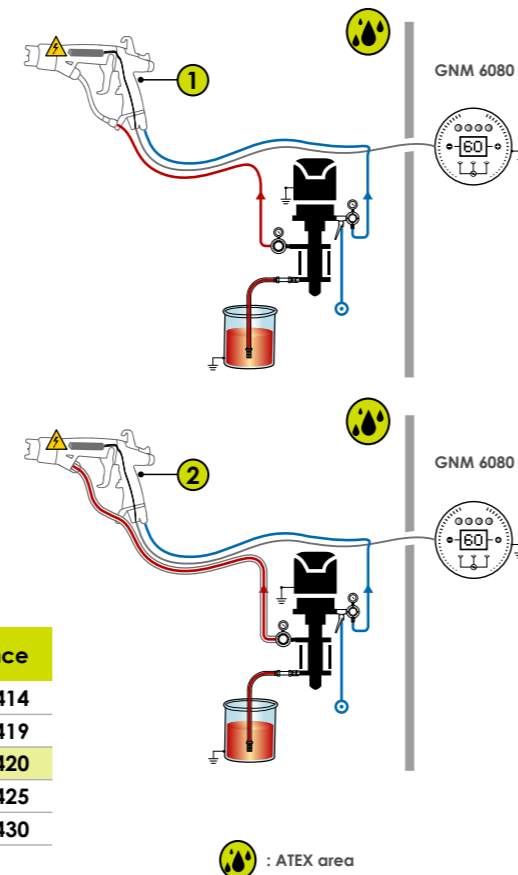

WHERE TO FIND US ?



Everclean Hand
900011711



Apply your Skills

- Airmix® technology for productivity and outstanding transfer efficiency of 93%
- Electrostatic charge delivers more paint savings
- Lightweight and ergonomically designed

Related Technologies



Airmix®



Electrostatic

Apply your Skills

www.sames-kremlin.com

Nanogun Airmix® Electrostatic Gun

NANO GUN



TECHNICAL DATA

Gun weight (g)	640	Recommended product viscosity	20 s to 120 s CA4
Gun length (mm) in operation	310	Max tip voltage (kV)	60
Paint flow rate - water (cc/min.)	from 290 to 1800	Max current (µA)	80
Max air supply pressure (bar)	7 (101psi)	Fluid max temperature (°C)	40
Max paint supply pressure (bar)	200 (2900 psi)	Hose lengths available (m)	7.5, 15 and 30
Pattern width (mm) at d=250 mm	210 to 380	Type of spray	Adjustable flat spray

ATEX marking: Nanogun Airmix® GNM6080
 CE 0080 II 2 G [0.24mJ] INERIS14ATEX0014
 CE 0080 II (2) G [0.24mJ] INERIS14ATEX0014


Nanogun Airmix® stands for Airmix® and High Voltage & Current Technology

Nanogun **Airmix®**: the association of 65 years of expertise of unique **Airmix®** spraying technology and the electrostatic application technology from **SAMES KREMLIN**.

Associated to the unique **Airmix®** spraying technology from **SAMES KREMLIN**, the electrostatic technology of the Nanogun delivers a terrific transfer efficiency. **Airmix®** low speed and small size paint particle bring a clear advantage for efficiency of the **electrostatic effect**.

We have developed the only **electrostatic gun** to spray with both high current and high voltage, guaranteeing optimal paint charge and **maximal efficient paint** transportation to the part.

Available for solvanted low, high resistivity or waterbased paint application, NANO GUN is connected with a large range of pumps, 1 or 2K solutions, insulated or not.

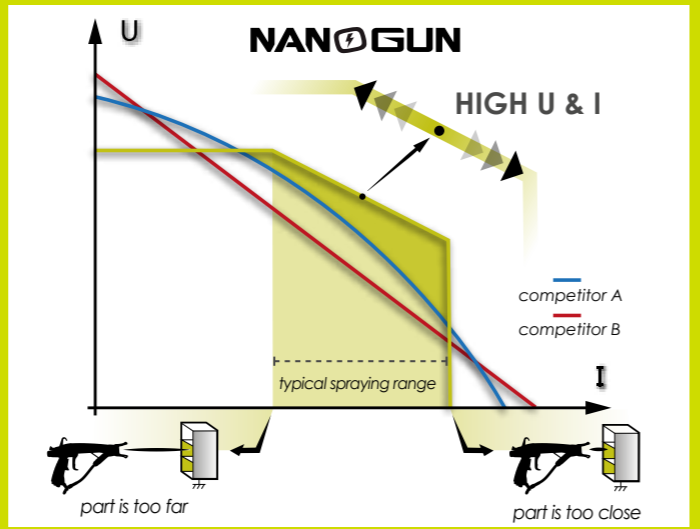

Markets:



CUSTOMER BENEFITS

- ➔ Premium performance for exceptional finish
- ➔ High productivity and transfer rate (93%)
- ➔ Very wide range of AIRMIX® tips
- ➔ Increased user comfort and reduced fatigue
- ➔ Easy to maintain: reduced number of components advanced diagnostics via the control module ready to use

INTUITIVE CONTROLS

- High voltage On/Off
- Pattern width



ENHANCED ERGONOMICS

- Grip & barrel design for comfortable use
- Lightweight
- Quick disconnect version
- Perfectly balanced
- Flexible hoses

AIRMIX® SPRAY AIRCAP

- All the **SAMES KREMLIN** know-how have been gathered in designing the tips to provide unrivalled spray atomization and finishing quality
- Homogeneity of the spray, less overspray

➔ GNM 6080 control module



- EASY TO MAINTAIN:**
 - Scheduled alert
 - Diagnostic alert
- EASY TO USE:**
 - kV setup value
 - 3 presets
 - 5m visibility display